


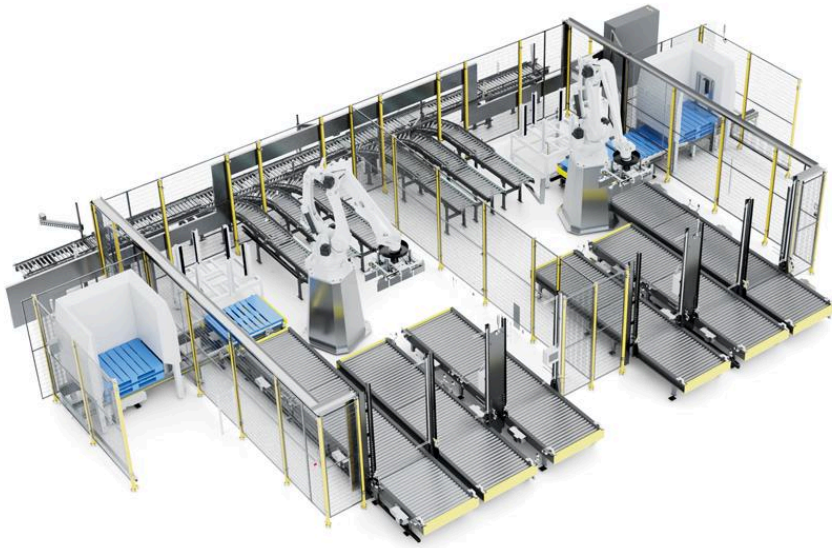

Case Palletizer

- ✓ 216.000 eggs/hour
- ✓ 600 cases/hour

The SANOVO Case Palletizer is a state-of-the-art, anthropomorphic robotic system designed to streamline case palletizing operations with unmatched efficiency. Capable of handling up to 800 cases/hour (288,000 eggs/hour), this versatile robot supports half cases, full cases, plastic crates, carton interlayers, wooden pallets, and even custom cases or crates*—ensuring seamless integration into diverse production environments.

With a specialized head system, the Case Palletizer picks up four half cases simultaneously, ensuring precise and efficient handling. Optional traceability systems with in-line weighing and labeling capabilities enable full product tracking, while automatic pallet ejection and interlayer management reduce manual labor. Equipped with barcode sorting for multiple product lines, each line independently forms a complete pallet of the same product.

Available in a stainless steel washable configuration (IP67), the Case Palletizer meets strict hygiene standards, making it suitable for even the most demanding production setups.

Key Features:


- **Versatile Handling:** Supports half cases, full cases, plastic crates, interlayers, and wooden pallets.
- **Traceability Ready:** Labeling and barcode sorting for full tracking.
- **Independent Lines:** Each line forms a complete pallet, enabling flexible product management.
- **Efficient Automation:** Automatic pallet ejection and interlayer placement for streamlined operations.
- **Hygienic Design:** Optional stainless steel washable configuration (IP67) for strict hygiene requirements.
- **Customizable:** Non-standard cases or crates can be tested for compatibility.

Automate your case palletizing process with the SANOVO Case Palletizer, an advanced solution for high-speed, flexible, and traceable production setups

We recommend using EggsCargoSystem® by GIORDANO.

Specifications

Number of lanes	up to 6 per robot
Power consumption	15-35 kW (configurator depended)
Air pressure	6 bar
Weight	2500-5000 kg
Certification	CE - UL - CSA
Ceiling height	Minimum 4,5 meter

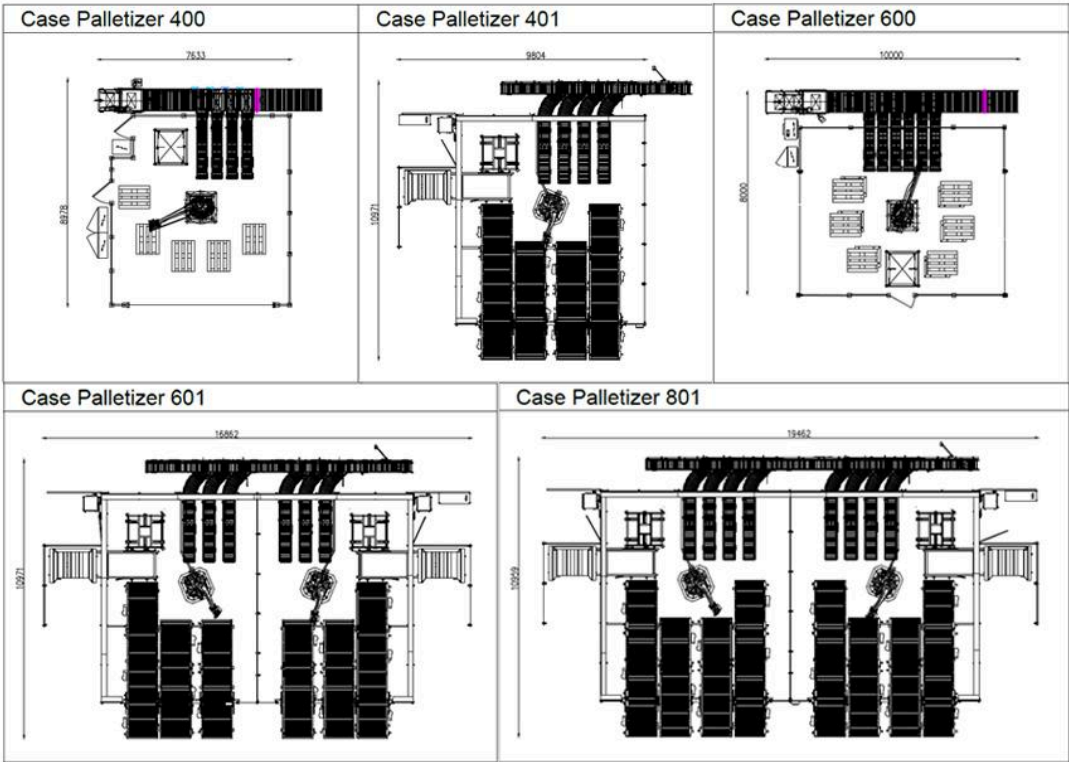

Main offices

EUROPE

SANOVO TECHNOLOGY DENMARK

Datavej 3
5220 Odense SØ
Denmark

Tel.: +45 66 16 28 32

SANOVO TECHNOLOGY NETHERLANDS

Ambachtsstraat 4
7122 MP Aalten
The Netherlands

Tel.: +31 543 473 868

SANOVO TECHNOLOGY ITALY

Via dell'Industria 68
I-36035 Marano Vicentino (VI)
Italy

Tel.: +39 0445 334 505/868 201

SANOVO TECHNOLOGY PROCESS

Datavej 12
5220 Odense SØ
Denmark

Tel.: +45 66 16 28 32

SANOVO PROCESS SOLUTIONS

Datavej 3
5220 Odense SØ
Denmark

Tel.: +45 66 16 28 32

THE AMERICAS

SANOVO TECHNOLOGY USA

15180 Keel St
Plymouth, MI 48170
USA

Tel.: +1 248 662 1030

SANOVO TECHNOLOGY SOUTH AMERICA

Rua Natal, 541 - Vila Bertioga, Mooca
CEP - 03186-030
Sao Paulo - Brazil

Tel.: +55 11 2020-7702

SANOVO TECHNOLOGY MEXICO

Querétaro
Mexico

Tel.: +52 442 325 7224

RAME-HART

3 Wing Drive, Suite 240
Cedar Knolls, NJ 07927
USA

Tel.: +1 973 335 0560

ASIA

SANOVO TECHNOLOGY CHINA

Building 3, No 139 Datieqiao Road
Songjiang, Shanghai
China

Tel.: +86 21 52340966

SANOVO TECHNOLOGY ASIA

Level 3A-2, Menara Mudajaya
No. 12A, Jalan PJU 7/3, Mutiara Damansara
47810 Petaling Jaya, Selangor, Malaysia

Tel.: +603-4820 8301

SANOVO TECHNOLOGY JAPAN

1-9-6-6F Shiba, Minato-ku
Tokyo 105-0014
Japan

Tel.: +81 3 6809-3700

SANOVO 
TECHNOLOGY GROUP

 **THORNICO**
Company